

NYLON LINK & BRICK BOND

Technical Specification

Curtain:

Sapphire (nylon link) - Constructed from high quality aluminium rods 75 mm apart, connected by injection moulded nylon links.

Orion (brick bond) - Mill finished aluminium or steel tube and links. Available in brick bond patterns giving 220 mm x 70 mm aperture or in a parallel line giving a 110 mm x 70 mm aperture.

Bottom Rail:

Sapphire (nylon link) - Aluminium 'T' section or extruded aluminium profile with rubber seal to bottom edge.

Orion (brick bond) - Aluminium 'T' section or extruded aluminium profile with rubber seal to bottom edge.

Side Guides:

Standard being 38 mm x 28 mm mill finished aluminium 'U' channel. Removable and fixed centre posts can be manufactured on request.

Barrels:

89 mm round galvanised steel barrel is used for most applications.

Operations:

Manual self-coiling via pre tensioned sprung barrels enabling push up, pull down action or via 240v electric tubular motor operated via rocker switch, key switch or remote control.

Finishes:

Sapphire (nylon link) – Standard colours of black, brown, white, red, silver and gold. Either mill finished aluminium side guides and bottom rail or powder coated to match links.


Orion (brick bond) – Standard mill finished aluminium or galvanised steel. Can be anodized or powder coated to a standard RAL / BS4800 number to suit an individual application.

Applications

The attractive visual appearance of our Sapphire (nylon link) and Orion (brick bond) grilles gives them a versatile range of applications.


Designed to rapidly convert an open space into a safe, secure area, whilst still retaining an attractive visual appearance, they are ideal for use in bars, hotel receptions, display areas, shop fronts, counters and similar locations. Either fitted into soffits, above false ceilings or supplied in a coil casing to match the curtains.

Nylon link roller shutters are available in a range of colours, whilst the aluminium brick bond grilles can be anodized or powder coated to any RAL / BS4800 number to compliment any colour scheme.

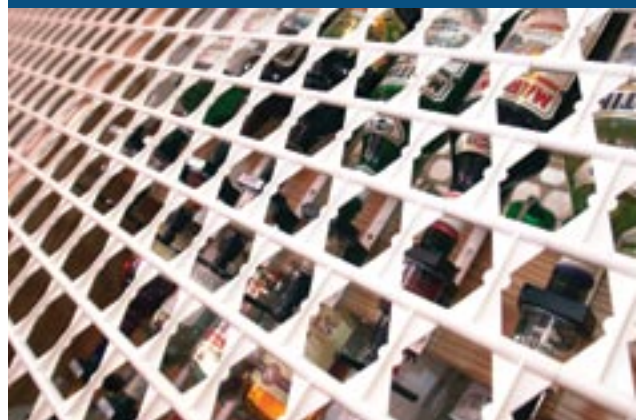

“Excellence in retractable security”

www.amosecurity.co.uk



Excellence in retractable security



Unit 6 Sycamore Industrial Estate
Walkley Lane, Heckmondwike, WF16 ONL
tel: 01924 412666 **fax:** 01924 412233
e-mail: sales@amosecurity.co.uk
web: www.amosecurity.co.uk

www.amosecurity.co.uk